


# OPEX<sup>®</sup> MODEL 72<sup>™</sup>

## Envelope Opener and Contents Extractor

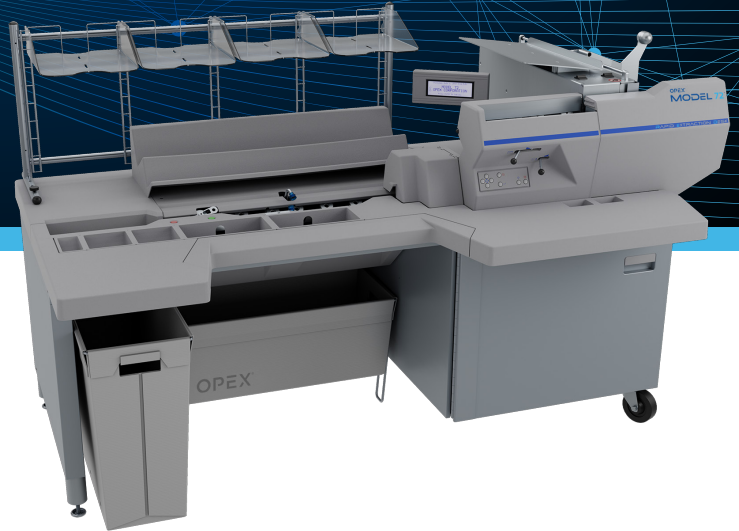

### WHY MODEL 72<sup>™</sup>?

The most cost-effective extraction desk device for mail extraction, engineered for high throughput rates of with less labor.

Designed with the operator in mind, the Model 72<sup>™</sup> extraction desk is the perfect blend of ergonomics, ease-of-use and accessibility. The Model 72<sup>™</sup> extraction desk provides an exceptional increase in measurable operator productivity. This adds up to increased operator satisfaction and more efficient mail opening and extracting.

### FEATURES

---

#### SPECIALIZED CUTTING TECHNOLOGY

Milling cutting uses a smaller cut depth that significantly reduces the potential of cutting contents, which is optimal for a variety of documents including thick and overly filled envelopes. Milling cutting creates a soft, feathered edge which lends itself to additional operator comfort.

#### MEMORY VERIFIER UNIT

A precise measuring device is included to ensure that all envelope contents are truly extracted prior to the envelope being discarded.

#### PERFORMANCE CONTROL CENTER

The Model 72<sup>™</sup> extractor features a control center that can show envelope count and provide a statistical analysis of operator rates and productivity.

#### AUTO-JOGGER

Each envelope is auto-jogged to shift contents away from both cut edges to achieve a new level of content protection and the ability to handle a wide array of envelopes.

### ADVANTAGES

---

#### SECURE

Each envelope is jogged to shift contents away from cut edges to keep contents secure and free from damage.

#### FLEXIBLE

A wide variety of envelopes can be opened safely and accurately.

#### EFFICIENT

The Model 72<sup>™</sup> extraction desk is designed to improve extraction throughput, while significantly reducing the amount of labor needed.

#### TRAINING

Easy to follow videos and instructor manuals ensure operators are up and running quickly and efficiently.

## SPECIFICATIONS

---

### BASIC SYSTEM CONFIGURATION

Dimensions (H x W x D)	47" x 76" x 41" (119.4 cm x 193 cm x 104.1 cm)
Envelope Feeding	Friction-based feeder up to 22" of mail
Envelope Width	3.5" - 6.38" (8.89 cm -16.21 cm)
Envelope Length	5" - 11.5" (12.7 cm x 29.21 cm)
Envelope Thickness	Up to 0.375" (0.953 cm)
Cycle Rate	Up to 3,600 mail pieces per hour
Top Cutter	Milling
Additional Features	Verifier
	Operator LCD
	Integrated workstation
	Tray Holder
Daily Duty Cycle	Unlimited
Popular Optional Features	Ergonomic desk chair

**Have questions?**

Contact us.

 [opex.com](https://opex.com)

 [info@opex.com](mailto:info@opex.com)

**OPEX**®